

Machine Automation Controller NJ series

Sysmac solutions for every machine
New controllers ideal for simple machines



NJ101-□□□□

Features

- Fully compatible with NJ501/301 Machine Automation Controllers, having the same concept, dimensions, general specifications, and functions. Ideal for machines without or with a low number of axes.
- The user program including the double precision floating point arithmetic instruction that is necessary for the coordinates correction, ST language and Function Blocks is executed fast, as well as the basic instructions and the special instructions.
- Integration of Logic and Motion in one CPU
- Synchronous control of all machine network devices : vision sensors, servo drives and field devices with the machine control network, EtherCAT. Synchronize the PLC Engine and the Motion Engine with the EtherCAT control period. Fast and highly-accurate control is possible.
- Standard programming : Conforms IEC 61131-3 standards and JIS B 3503, variable-based instructions including the PLCopen® Motion function blocks
- Complete and robust machine automation: fast control performance and basic functions and reliability of industrial controllers
 - Fan-free operation in ambient temperature between 0 to 55°C
 - Complete RAS functions: Transmission frame error check, timeout, bus diagnosis, Watchdog (WDT), memory check, and topology check, etc.


Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products. Windows is registered trademarks of Microsoft Corporation in the USA and other countries. EtherCAT® is a registered trademark of Beckhoff Automation GmbH for their patented technology. CompoNet™, DeviceNet™ and EtherNet/IP™ are trademarks of the ODVA. Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.

Ordering Information

International Standards

- The standards are abbreviated as follows: U: UL, U1: UL(Class I Division 2 Products for Hazardous Locations), C: CSA, UC: cULus, UC1: cULus (Class I Division 2 Products for Hazardous Locations), CU: cUL, N: NK, L: Lloyd, CE: EC Directives, C-Tick mark, and KC: KC Registration.
- Contact your OMRON representative for further details and applicable conditions for these standards.





NJ101 CPU Units

Product Name	Specifications				Current consumption (A)		Model	Standards
	I/O capacity / maximum number of configuration Units (Expansion Racks)	Program capacity	Memory capacity for variables	Number of motion axes	5 VDC	24 VDC		
 NJ101 CPU Units	2,560 points / 40 Units (3 Expansion Racks)	3 MB	0.5 MB: Retained during power interruption 2 MB: Not retained during power interruption	2	1.90	-	NJ101-1000 NJ101-9000	UC1, N, L, CE, C-Tick, KC
				0				

Recommended EtherCAT and EtherNet/IP Communications Cables

Use Straight STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT. Use Straight or cross STP (shielded twisted-pair) cable of category 5 or higher for EtherNet/IP.

Cabel with Connectors

Item		Recommended manufacturer	Cable length (m) *1	Model
Wire Gauge and Number of Pairs: AWG27, 4-pair Cable Cable Sheath material: LSZH *2 Cable color: Yellow *3	Standard type Cable with Connectors on Both Ends (RJ45/RJ45) 	OMRON	0.3	XS6W-6LSZH8SS30CM-Y
			0.5	XS6W-6LSZH8SS50CM-Y
			1	XS6W-6LSZH8SS100CM-Y
			2	XS6W-6LSZH8SS200CM-Y
			3	XS6W-6LSZH8SS300CM-Y
			5	XS6W-6LSZH8SS500CM-Y
Wire Gauge and Number of Pairs: AWG22, 2-pair Cable	Rugged type Cable with Connectors on Both Ends (RJ45/RJ45) 	OMRON	0.3	XS5W-T421-AMD-K
			0.5	XS5W-T421-BMD-K
			1	XS5W-T421-CMD-K
			2	XS5W-T421-DMD-K
			5	XS5W-T421-GMD-K
	Rugged type Cable with Connectors on Both Ends (M12/RJ45) 	OMRON	0.3	XS5W-T421-AMC-K
			0.5	XS5W-T421-BMC-K
			1	XS5W-T421-CMC-K
			2	XS5W-T421-DMC-K
			5	XS5W-T421-GMC-K
Rugged type Cable with Connectors on Both Ends (M12 L/RJ45) 	OMRON	0.3	XS5W-T422-AMC-K	
		0.5	XS5W-T422-BMC-K	
		1	XS5W-T422-CMC-K	
		2	XS5W-T422-DMC-K	
		5	XS5W-T422-GMC-K	
			10	XS5W-T422-JMC-K

*1. Standard type cables length 0.2, 0.3, 0.5, 1, 1.5, 2, 3, 5, 7.5, 10, 15 and 20m are available.

Rugged type cables length 0.3, 0.5, 1, 2, 3, 5, 10 and 15m are available.

*2. The lineup features Low Smoke Zero Halogen cables for in-cabinet use and PUR cables for out-of-cabinet use.

*3. Cables colors are available in blue, yellow, or Green

Note: For details, refer to Cat.No.G019.

Cables / Connectors

Item		Recommended manufacturer	Model
For EtherCAT and EtherNet/IP	Wire Gauge and Number of Pairs: AWG24, 4-pair Cable	Cables	Tonichi Kyosan Cable, Ltd. NETSTAR-C5E SAB 0.5 × 4P *1
			Kuramo Electric Co. KETH-SB *1
			SWCC Showa Cable Systems Co. FAE-5004 *1
	Wire Gauge and Number of Pairs: AWG22, 2-pair Cable	RJ45 Connectors	Panduit Corporation MPS588-C *1
		Cables	Kuramo Electric Co. KETH-PSB-OMR *2
		RJ45 Assembly Connector	Nihon Electric Wire&Cable Co.,Ltd. PNET/B *2
		OMRON XS6G-T421-1 *2	
For EtherNet/IP	Wire Gauge and Number of Pairs: 0.5 mm, 4-pair Cable	Cables	Fujikura Ltd. F-LINK-E 0.5mm × 4P *3
		RJ45 Connectors	Panduit Corporation MPS588 *3

*1. We recommend you to use above cable for EtherCAT and EtherNet/IP, and RJ45 Connector together.

*2. We recommend you to use above cable for EtherCAT and EtherNet/IP, and RJ45 Assembly Connector together.

*3. We recommend you to use above cable For EtherNet/IP and RJ45 Connectors together.

Accessories

The following accessories come with the CPU Unit.

Item	Specification
Battery	CJ1W-BAT01
End Cover	CJ1W-TER01 (necessary to be connected to the right end of the CPU Rack.)
End Plate	PPF-M (2 pcs)

General Specification

Item	NJ101-□□□□	
Enclosure	Mounted in a panel	
Grounding method	Ground to less than 100 Ω	
Dimensions (height×depth×width)	90 mm × 90 mm × 90 mm	
Weight	550 g (including the End Cover)	
Current consumption	5 VDC, 1.90 A (including SD Memory Card and End Cover)	
Operation environment	Ambient operating temperature	0 to 55°C
	Ambient operating humidity	10% to 90% (with no condensation)
	Atmosphere	Must be free from corrosive gases.
	Ambient storage temperature	-20 to 75°C (excluding battery)
	Altitude	2,000 m or less
	Pollution degree	2 or less: Conforms to JIS B3502 and IEC 61131-2.
	Noise immunity	2 kV on power supply line (Conforms to IEC 61000-4-4.)
	Overvoltage category	Category II: Conforms to JIS B3502 and IEC 61131-2.
	EMC immunity level	Zone B
Vibration resistance	Conforms to IEC 60068-2-6. 5 to 8.4 Hz with 3.5-mm amplitude, 8.4 to 150 Hz Acceleration of 9.8 m/s ² for 100 min in X, Y, and Z directions (10 sweeps of 10 min each = 100 min total)	
	Shock resistance	Conforms to IEC 60068-2-27. 147 m/s ² , 3 times in X, Y, and Z directions (100 m/s ² for Relay Output Units)
Battery	Life	5 years at 25°C
	Model	CJ1W-BAT01
Applicable standards	Conforms to cULus, NK, LR, EC Directives, C-Tick and KC.	

Performance Specifications

Item			NJ101-	
			1000	9000
Processing time	Instruction execution times	LOAD instructions	3.3ns (5.0ns or less)	
		Math instructions (for Long Real Data)	70 ns or more	
Programming	Program capacity*1	Size	3 MB	
		Number	POU definition	450
			POU instance	1,800
		Variables capacity	No Retain attribute*2	Size
	Number			22,500
	Retain attribute*3		Size	0.5 MB
		Number	5,000	
	Data type	Number	1,000	
	Memory for CJ-Series Units (Can be specified with AT specifications for variables.)	CIO Area	6,144 words (CIO 0 to CIO 6143)	
		Work Area	512 words (W0 to W511)	
Holding Area		1,536 words (H0 to H1535)		
DM Area		32,768 words (D0 to D32767)		
EM Area		32,768 words × 4 banks (E0_00000 to E3_32767)		
Unit configuration	Maximum number of connectable Units	Maximum number of CJ/NX unit per CPU Rack or Expansion Rack	10 Units	
		Maximum number of CJ unit on the system	40 Units	
		Maximum number of NX unit on the system	400 (on NX series EtherCAT slave terminal)	
	Maximum number of expansion racks	3 max.		
	I/O Capacity	Maximum number of I/O points on CJ-series units	2,560 points max.	
	Power supply unit for CPU rack and expansion racks	Model	NJ-P□3001	
		Power OFF detection time	AC power supply	30 to 45 ms
DC power supply			22 to 25 ms	
Motion control	Number of controlled axes	Maximum number of controlled axes *4	6 axes	
		Maximum number of used real axes *5	2 axes	
		Maximum number of axes for single-axis control	6 axes	
		Maximum number of axes for linear interpolation axis control	4 axes per axes group	
		Number of axes for circular interpolation axis control	2 axes per axes group	
	Maximum number of axes groups	32 groups		
	Motion control period	The same control period as that is used for the process data communications cycle for EtherCAT.		
	Cams	Number of cam data points	Maximum points per cam table	65,535 points
			Maximum points for all cam tables	262,140 points
		Maximum number of cam tables	160 tables	
Position units	Pulses, millimeters, micrometers, nanometers, degrees or inches			
Override factors	0.00% or 0.01% to 500.00%			
Peripheral USB port	Supported services	Sysmac Studio connection		
	Physical layer	USB 2.0-compliant B-type connector		
	Transmission distance between Hub and Node	5 m max.		
Built-in EtherNet/IP Port	Number of port	1		
	Physical layer	10Base-T or 100Base-TX		
	Frame length	1514 max.		
	Media access method	CSMA/CD		
	Modulation	Baseband		
	Topology	Star		
	Baud rate	100 Mbps (100Base-TX)		

*1. This is the capacity for the execution objects and variable tables (including variable names).

*2. Words for CJ-series Units in the CIO and Work Areas are not included.

*3. Words for CJ-series Units in the Holding, DM, and EM Areas are not included.

*4. This is the total for all axis types.

*5. This is the total number of axes that are set as servo axes or encoder axes and are also set as used axes.

Item		NJ101-		
		1000	9000	
Built-in EtherNet/IP Port	Transmission media		STP (shielded, twisted-pair) cable of Ethernet category 5, 5e or higher	
	Maximum transmission distance between hub and node		100m	
	Maximum number of cascade connections		There are no restrictions if a switching hub is used.	
	CIP service: Tag Data Links (Cyclic Communications)	Maximum number of connections		32
		Packet interval *6		1 to 10,000 ms in 1.0-ms increments*8 Can be set for each connection. (Data will be refreshed at the set interval, regardless of the number of nodes.)
		Permissible communications band		3,000 pps*7 (including heartbeat)
		Maximum number of tag sets		32
		Tag types		Network variables, CIO, Work, Holding, DM, and EM Areas
		Number of tags per connection (i.e., per tag set)		8 (7 tags if Controller status is included in the tag set.)
		Maximum number of tag		256
		Maximum link data size per node (total size for all tags)		19,200 bytes
		Maximum data size per connection		600 bytes
		Maximum number of registrable tag sets		32 (1 connection = 1 tag set)
	Maximum tag set size		600 bytes (Two bytes are used if Controller status is included in the tag set.)	
	Multi-cast packet filter *8		Supported.	
	Cip message service: Explicit messages	Class 3 (number of connections)		32 (clients plus server)
		UCMM (non- connection type)	Maximum number of clients that can communicate at one time	32
Maximum number of servers that can communicate at one time			32	
Maximum number of TCP socket service		30		
Built-in EtherCAT Port	Communications standard		IEC 61158 Type12	
	EtherCAT master specifications		Class B (Feature Pack Motion Control compliant)	
	Physical layer		100BASE-TX	
	Modulation		Baseband	
	Baud rate		100 Mbps (100Base-TX)	
	Duplex mode		Auto	
	Topology		Line, daisy chain, and branching	
	Transmission media		Twisted-pair cable of category 5 or higher (double-shielded straight cable with aluminum tape and braiding)	
	Maximum transmission distance between nodes		100m	
	Maximum number of slaves		64	
	Range of node address		1-192	
	Maximum process data size		Inputs: 5,736 bytes Outputs: 5,736 bytes (However, the maximum number of process data frames is 4.)	
	Maximum process data size per slave		Inputs: 1,434 bytes Outputs: 1,434 bytes	
	Communications cycle		1,000/2,000/4,000 μs	
Sync jitter		1 μs max.		
Internal clock		At ambient temperature of 55°C: -3.5 to +0.5 min error per month At ambient temperature of 25°C: -1.5 to +1.5 min error per month At ambient temperature of 0°C: -3 to +1 min error per month		

*6. Data is updated on the line in the specified interval regardless of the number of nodes.

*7. Means packets per second, i.e., the number of communications packets that can be sent or received in one second.

*8. An IGMP client is mounted for the EtherNet/IP port. If an ethernet switch that supports IGMP snooping is used, filtering of unnecessary multicast packets is performed.

Function Specifications

Item		NJ101-□□□□			
Tasks	Function	I/O refreshing and the user program are executed in units that are called tasks. Tasks are used to specify execution conditions and execution priority.			
		Periodically executed tasks	Maximum number of primary periodic tasks	1	
			Maximum number of periodic tasks	3	
		Conditionally executed tasks	Maximum number of event tasks	32	
	Execution conditions		When Activate Event Task instruction is executed or when condition expression for variable is met.		
Setup	System service monitoring settings		The execution interval and the percentage of the total user program execution time are monitored for the system services (processes that are executed by the CPU Unit separate from task execution).		
Programming	POU (program organization units)	Programs		POUs that are assigned to tasks.	
		Function blocks		POUs that are used to create objects with specific conditions.	
		Functions		POUs that are used to create an object that determine unique outputs for the inputs, such as for data processing.	
	Programming languages	Types		Ladder diagrams *1 and structured text (ST)	
	Namespaces		A concept that is used to group identifiers for POU definitions.		
	Variables	External access of variables	Network variables	The function which allows access from the HMI, host computers, or other Controllers	
	Data types	Data types	Boolean	BOOL	
			Bit strings	BYTE, WORD, DWORD, LWORD	
			Integers	INT, SINT, DINT, LINT, UINT, USINT, UDINT, ULINT	
			Real numbers	REAL, LREAL	
			Durations	TIME	
			Dates	DATE	
			Times of day	TIME_OF_DAY	
			Date and time	DATE_AND_TIME	
		Text strings	STRING		
		Derivative data types		Structures, unions, enumerations	
		Structures	Function	A derivative data type that groups together data with different variable types.	
			Maximum number of members	2048	
			Nesting maximum levels	8	
			Member data types	Basic data types, structures, unions, enumerations, array variables	
Unions		Specifying member offsets	You can use member offsets to place structure members at any memory locations.		
	Function	A derivative data type that groups together data with different variable types.			
	Maximum number of members	4			
Enumerations	Member data types	BOOL, BYTE, WORD, DWORD, LWORD			
	Function	A derivative data type that uses text strings called enumerators to express variable values.			
Data type attributes	Array specifications	Function	An array is a group of elements with the same data type. You specify the number (subscript) of the element from the first element to specify the element.		
		Maximum number of dimensions	3		
		Maximum number of elements	65535		
		Array specifications for FB Instances	Supported.		
	Range specifications		You can specify a range for a data type in advance. The data type can take only values that are in the specified range.		
	Libraries		User libraries		

*1. Inline ST is supported. (Inline ST is ST that is written as an element in a ladder diagram.)

Item		NJ101-□□□□		
Motion Control *2	Control modes		position control, velocity control, torque control	
	Axis types		Servo axes, virtual servo axes, encoder axes, and virtual encoder axes	
	Positions that can be managed		Command positions and actual positions	
	Single-axis	Single-axis position control	Absolute positioning	Positioning is performed for a target position that is specified with an absolute value.
			Relative positioning	Positioning is performed for a specified travel distance from the command current position.
			Interrupt feeding	Positioning is performed for a specified travel distance from the position where an interrupt input was received from an external input.
			Cyclic synchronous absolute positioning	A positioning command is output each control period in Position Control Mode.
		Single-axis velocity control	Velocity control	Velocity control is performed in Position Control Mode.
			Cyclic synchronous velocity control	A velocity command is output each control period in Velocity Control Mode.
		Single-axis torque control	Torque control	The torque of the motor is controlled.
		Single-axis synchronized control	Starting cam operation	A cam motion is performed using the specified cam table.
			Ending cam operation	The cam motion for the axis that is specified with the input parameter is ended.
			Starting gear operation	A gear motion with the specified gear ratio is performed between a master axis and slave axis.
			Positioning gear operation	A gear motion with the specified gear ratio and sync position is performed between a master axis and slave axis.
			Ending gear operation	The specified gear motion or positioning gear motion is ended.
	Synchronous positioning		Positioning is performed in sync with a specified master axis.	
	Master axis phase shift		The phase of a master axis in synchronized control is shifted.	
	Combining axes		The command positions of two axes are added or subtracted and the result is output as the command position.	
	Single-axis manual operation	Powering the servo	The Servo in the Servo Drive is turned ON to enable axis motion.	
		Jogging	An axis is jogged at a specified target velocity.	
	Auxiliary functions for single-axis control	Resetting axis errors	Axes errors are cleared.	
		Homing	A motor is operated and the limit signals, home proximity signal, and home signal are used to define home.	
		Homing with parameter	Specifying the parameter, a motor is operated and the limit signals, home proximity signal, and home signal are used to define home.	
		High-speed homing	Positioning is performed for an absolute target position of 0 to return to home.	
		Stopping	An axis is decelerated to a stop at the specified rate.	
		Immediately stopping	An axis is stopped immediately.	
		Setting override factors	The target velocity of an axis can be changed.	
		Changing the current position	The command current position or actual current position of an axis can be changed to any position.	
Enabling external latches		The position of an axis is recorded when a trigger occurs.		
Disabling external latches		The current latch is disabled.		
Zone monitoring		You can monitor the command position or actual position of an axis to see when it is within a specified range (zone).		
Enabling digital cam switches		You can turn a digital output ON and OFF according to the position of an axis.		
Monitoring axis following error		You can monitor whether the difference between the command positions or actual positions of two specified axes exceeds a threshold value.		
Resetting the following error		The error between the command current position and actual current position is set to 0.		
Torque limit	The torque control function of the Servo Drive can be enabled or disabled and the torque limits can be set to control the output torque.			
Command position compensation	The function which compensate the position for the axis in operation.			
Start velocity	You can set the initial velocity when axis motion starts.			

*2. Supported only by the NJ101-1000.

Item			NJ101-□□□□		
Motion Control *2	Axes groups	Multi-axes coordinated control	Absolute linear interpolation	Linear interpolation is performed to a specified absolute position.	
			Relative linear interpolation	Linear interpolation is performed to a specified relative position.	
			Circular 2D interpolation	Circular interpolation is performed for two axes.	
			Axes group cyclic synchronous absolute positioning	A positioning command is output each control period in Position Control Mode.	
		Auxiliary functions for multi-axes coordinated control	Resetting axes group errors	Axes group errors and axis errors are cleared.	
			Enabling axes groups	Motion of an axes group is enabled.	
			Disabling axes groups	Motion of an axes group is disabled.	
			Stopping axes groups	All axes in interpolated motion are decelerated to a stop.	
			Immediately stopping axes groups	All axes in interpolated motion are stopped immediately.	
			Setting axes group override factors	The blended target velocity is changed during interpolated motion.	
			Reading axes group positions	The command current positions and actual current positions of an axes group can be read.	
			Changing the axes in an axes group	The Composition Axes parameter in the axes group parameters can be overwritten temporarily.	
		Common items	Cams	Setting cam table properties	The end point index of the cam table that is specified in the input parameter is changed.
				Saving cam tables	The cam table that is specified with the input parameter is saved in non-volatile memory in the CPU Unit.
	Generating cam tables			The cam table that is specified with the input parameter is generated from the cam property and cam node.	
	Parameters		Writing MC settings	Some of the axis parameters or axes group parameters are overwritten temporarily.	
			Changing axis parameters	You can access and change the axis parameters from the user program.	
	Auxiliary functions	Count modes		You can select either Linear Mode (finite length) or Rotary Mode (infinite length).	
		Unit conversions		You can set the display unit for each axis according to the machine.	
		Acceleration/ deceleration control	Automatic acceleration/ deceleration control	Jerk is set for the acceleration/deceleration curve for an axis motion or axes group motion.	
			Changing the acceleration and deceleration rates	You can change the acceleration or deceleration rate even during acceleration or deceleration.	
		In-position check		You can set an in-position range and in-position check time to confirm when positioning is completed.	
		Stop method		You can set the stop method to the immediate stop input signal or limit input signal.	
		Re-execution of motion control instructions		You can change the input variables for a motion control instruction during execution and execute the instruction again to change the target values during operation.	
		Multi-execution of motion control instructions (Buffer Mode)		You can specify when to start execution and how to connect the velocities between operations when another motion control instruction is executed during operation.	
		Continuous axes group motions (Transition Mode)		You can specify the Transition Mode for multi-execution of instructions for axes group operation.	
		Monitoring functions	Software limits		Software limits are set for each axis.
			Following error		The error between the command current value and the actual current value is monitored for an axis.
Velocity, acceleration rate, deceleration rate, torque, interpolation velocity, interpolation acceleration rate, and interpolation deceleration rate			You can set and monitor warning values for each axis and each axes group.		
Absolute encoder support		You can use an OMRON G5-Series Servomotor with an Absolute Encoder to eliminate the need to perform homing at startup.			
Input signal logic inversion		You can inverse the logic of immediate stop input signal, positive limit input signal, negative limit input signal, or home proximity input signal.			
External interface signals			The Servo Drive input signals listed on the right are used. Home signal, home proximity signal, positive limit signal, negative limit signal, immediate stop signal, and interrupt input signal		

*2. Supported only by the NJ101-1000.

Item			NJ101-□□□□	
Unit (I/O) management	EtherCAT slaves	Maximum number of slaves	64	
	CJ-series Units	Maximum number of Units	40	
Communications	Peripheral USB port		A port for communications with various kinds of Support Software running on a personal computer.	
	EtherNet/IP port	Communications protocol		TCP/IP, UDP/IP
		CIP communications service	Tag data links	Programless cyclic data exchange is performed with the devices on the EtherNet/IP network.
			Message communications	CIP commands are sent to or received from the devices on the EtherNet/IP network.
		TCP/IP applications	Socket services	Data is sent to and received from any node on Ethernet using the UDP or TCP protocol. Socket communications instructions are used.
			FTP client	File can be read from or written to computers at other Ethernet nodes from the CPU Unit. FTP client communications instructions are used.
			FTP server	Files can be read from or written to the SD Memory Card in the CPU Unit from computers at other Ethernet nodes.
			Automatic clock adjustment	Clock information is read from the NTP server at the specified time or at a specified interval after the power supply to the CPU Unit is turned ON. The internal clock time in the CPU Unit is updated with the read time.
	Supported services	SNMP agent	Built-in EtherNet/IP port internal status information is provided to network management software that uses an SNMP manager.	
		Process data communications	A communications method to exchange control information in cyclic communications between the EtherCAT master and slaves. This communications method is defined by CoE.	
	EtherCAT port	SDO communications	A communications method to exchange control information in noncyclic event communications between EtherCAT master and slaves. This communications method is defined by CoE.	
		Network scanning		Information is read from connected slave devices and the slave configuration is automatically generated.
		DC (distributed clock)		Time is synchronized by sharing the EtherCAT system time among all EtherCAT devices (including the master).
		Packet monitoring		The frames that are sent by the master and the frames that are received by the master can be saved. The data that is saved can be viewed with WireShark or other applications.
		Enable/disable settings for slaves		The slaves can be enabled or disabled as communications targets.
		Disconnecting/connecting slaves		Temporarily disconnects a slave from the EtherCAT network for maintenance, such as for replacement of the slave, and then connects the slave again.
		Supported application protocol	CoE	SDO messages of the CAN application can be sent to slaves via EtherCAT.
	Communications instructions			The following instructions are supported. CIP communications instructions, socket communications instructions, SDO message instructions, no-protocol communications instructions, protocol macro instructions, and FTP client instructions
	Operation management	RUN output contacts		The output on the NJ-P□3001 Power Supply Unit turns ON in RUN mode.
System management	Event logs	Function		Events are recorded in the logs.
		Maximum number of events	System event log	512
			Access event log	512
			User-defined event log	512

Item			NJ101-□□□□	
Debugging	Online editing	Single	Programs, function blocks, functions, and global variables can be changed online. Different operators can change different POU's across a network.	
	Forced refreshing		The user can force specific variables to TRUE or FALSE.	
	Maximum number of forced variables	Device variables for EtherCAT slaves	64	
		Device variables for CJ-series Units and variables with AT specifications	64	
	MC test run		Motor operation and wiring can be checked from the Sysmac Studio. *	
	Synchronizing		The project file in the Sysmac Studio and the data in the CPU Unit can be made the same when online.	
	Differentiation monitoring		Rising/falling edge of contacts can be monitored.	
	Maximum number of contacts		8	
	Data tracing	Types	Single triggered trace	When the trigger condition is met, the specified number of samples are taken and then tracing stops automatically.
			Continuous trace	Data tracing is executed continuously and the trace data is collected by the Sysmac Studio.
		Maximum number of simultaneous data trace		2
		Maximum number of records		10,000
		Sampling	Maximum number of sampled variables	48 variables
		Timing of sampling		Sampling is performed for the specified task period, at the specified time, or when a sampling instruction is executed.
		Triggered traces	Trigger conditions	
Delay			Trigger position setting: A slider is used to set the percentage of sampling before and after the trigger condition is met.	
Simulation			The operation of the CPU Unit is emulated in the Sysmac Studio.	
Reliability functions	Self-diagnosis	Controller errors	Levels	
		User-defined errors		Major fault, partial fault, minor fault, observation, and information User-defined errors are registered in advance and then records are created by executing instructions.
		Levels		8 levels
Security	Protecting software assets and preventing operating mistakes	CPU unit names and serial IDs		When going online to a CPU Unit from the Sysmac Studio, the CPU Unit name in the project is compared to the name of the CPU Unit being connected to.
		Protection	User program transfer with no restoration information	You can prevent reading data in the CPU Unit from the Sysmac Studio.
			CPU Unit write protection	You can prevent writing data to the CPU Unit from the Sysmac Studio or SD Memory Card.
			Overall project file protection	You can use passwords to protect .smc files from unauthorized opening on the Sysmac Studio.
			Data protection	You can use passwords to protect POU's on the Sysmac Studio.
		Verification of operation authority		Online operations can be restricted by operation rights to prevent damage to equipment or injuries that may be caused by operating mistakes.
		Number of groups		5
Verification of user program execution ID		The user program cannot be executed without entering a user program execution ID from the Sysmac Studio for the specific hardware (CPU Unit).		

* Supported only by the NJ101-1000.

Item		NJ101-□□□□		
SD memory card functions	Storage type	SD Memory Card, SDHC Memory Card		
	Application	Automatic transfer from SD memory card	The data in the autoloader folder on an SD Memory Card is automatically loaded when the power supply to the Controller is turned ON.	
		SD memory card operation instructions	You can access SD Memory Cards from instructions in the user program.	
		File operations from the Sysmac Studio	You can perform file operations for Controller files in the SD Memory Card and read/write standard document files on the computer.	
		SD memory card life expiration detection	Notification of the expiration of the life of the SD Memory Card is provided in a system-defined variable and event log.	
Backup functions *1	SD Memory Card backup functions	Operation	Using front switch	You can use front switch to backup, compare, or restore data.
			Using system-defined variables	You can use system-defined variables to backup or compare data.
			Memory card operations dialog box on Sysmac Studio	Backup and verification operations can be performed from the SD Memory Card Operations Dialog Box on the Sysmac Studio.
			Using instruction	Backup operation can be performed by using instruction.
	Protection	Prohibiting backing up data to the SD memory card	Prohibit SD Memory Card backup functions.	
		Sysmac Studio Controller backup functions		Backup, restore, and verification operations for Units can be performed from the Sysmac Studio.

Unit Versions

Units	Models	Unit Version
NJ101 CPU Units	NJ101-□□□□	Unit version 1.10


Unit Versions and Corresponding Sysmac Studio Versions

The following table gives the relationship between unit versions of CPU Units and the corresponding Sysmac Studio versions.

Unit version of CPU Unit	Corresponding version of Sysmac Studio
1.10	1.13

External Interface

An NJ101 CPU Unit (NJ101-□□□□) provides three communications ports for external interfaces: a peripheral USB port, a built-in EtherNet/IP port and a built-in EtherCAT port.

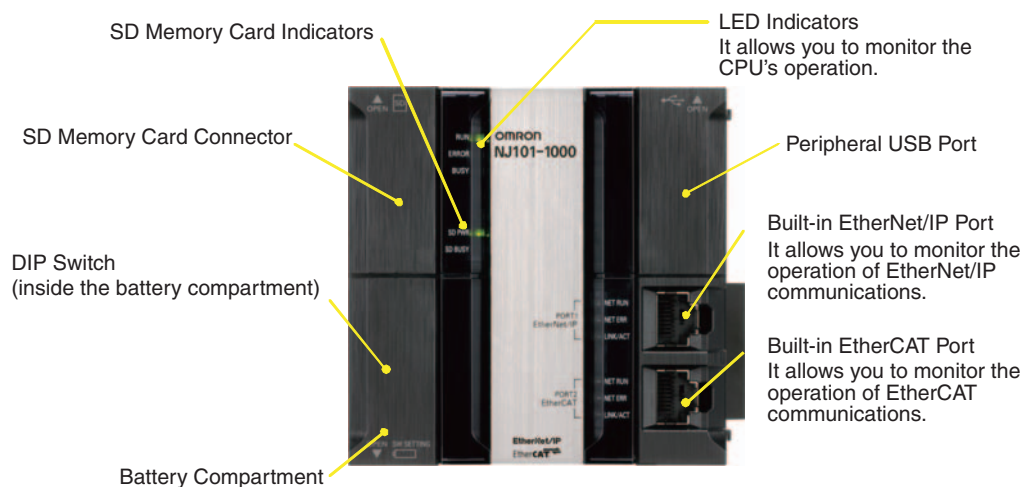

Peripheral USB Port

Item	Specification
Physical layer	USB 2.0-compliant B-type connector
Transmission distance	5 m max.

Use commercially available USB cables.
Specification: USB 2.0 (or 1.1) cable (A connector - B connector), 5.0 m max.

Built-in EtherNet/IP Port

Item	Specification
Physical layer	10BASE-T/100BASE-TX
Media access method	CSMA/CD
Modulation	Baseband
Topology	Star
Baud rate	100 Mbps (100Base-TX)
Transmission media	Straight or cross STP (shielded twisted-pair) cable of category 5 or higher.
Transmission distance	100 m max. (distance between ethernet switch and node)



You can connect Sysmac Studio with built-in EtherNet/IP port.

Built-in EtherCAT Port

Item	Specification
Synchronization	DC (distributed clock)
Physical layer	100BASE-TX
Modulation	Baseband
Baud rate	100 Mbps (100BASE-TX).
Duplex mode	Automatic
Topology	Line, daisy chain and branching
Transmission media	Shielded twisted-pair (STP); Category 5 or higher straight cable with double shielding (braiding and aluminum foil tape)
Transmission distance	100 m max. between nodes

Dimensions

NJ101 CPU Units (NJ101-□□□□)

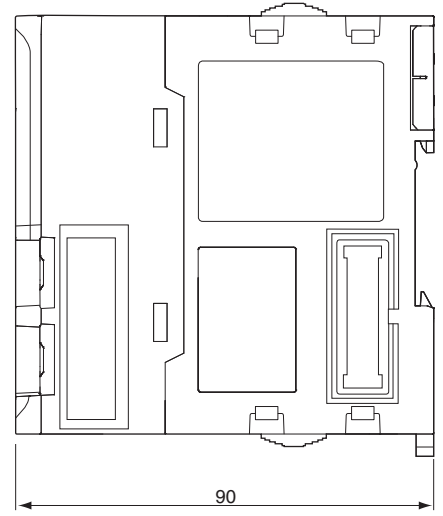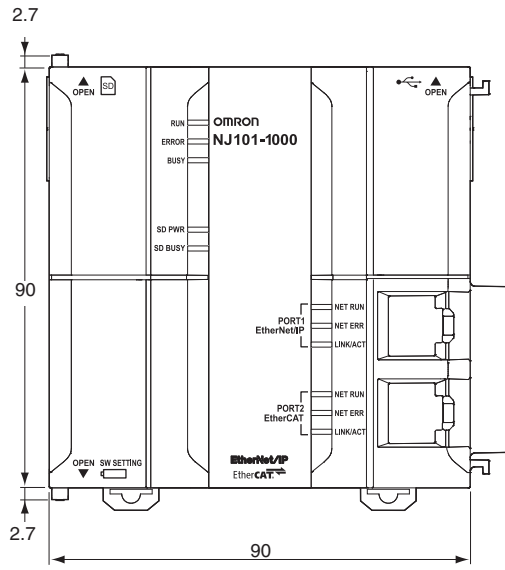

Related Manuals

Cat. No.	Model number	Manual	Application	Description
W513	NJ501-□□□□ NJ301-□□□□	NJ Series Startup Guide (CPU Unit)	Using the NJ-series CPU Unit for the first time	The startup procedures for using an NJ-series CPU Unit and the basic operating instructions for the Sysmac Studio are described with a simple sequence control example.
W514	NJ501-□□□□ NJ301-□□□□	NJ Series Startup Guide (Motion Control)	Using the motion control function module of the NJ series for the first time	The startup procedures for setting axis parameters and performing simple one-axis positioning and two-axis linear interpolation with an NJ-series CPU Unit and the operating instructions for the Sysmac Studio are described.
W500	NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ-series CPU Unit Hardware User's Manual	Learning the basic specifications of the NJ-series CPU Units, including introductory information, designing, installation, and maintenance Mainly hardware information is provided.	An introduction to the entire NJ-series system is provided along with the following information on a Controller built with an NJ-series CPU Unit. <ul style="list-style-type: none"> • Features and system configuration • Introduction • Part names and functions • General specifications • Installation and wiring • Maintenance and inspection Use this manual together with the <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).
W501	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series CPU Unit Software User's Manual	Learning how to program and set up an NJ/NX-series CPU Unit Mainly software information is provided.	The following information is provided on a Controller built with an NJ/NX-series CPU Unit. <ul style="list-style-type: none"> • CPU Unit operation • CPU Unit features • Initial settings • Programming language specifications and programming with the IEC 61131-3 standard. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500).
W507	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series CPU Unit Motion Control User's Manual	Learning about motion control settings and programming concepts	The settings and operation of the CPU Unit and programming concepts for motion control are described. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500) and <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).
W505	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series CPU Unit Built-in EtherCAT® Port User's Manual	Using the built-in EtherCAT port on an NJ/NX-series CPU Unit	Information on the built-in EtherCAT port is provided. This manual provides an introduction and provides information on the configuration, features, and setup. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500) and <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).
W506	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series CPU Unit Built-in EtherNet/IP Port User's Manual	Using the built-in EtherNet/IP port on an NJ/NX-series CPU Unit	Information on the built-in EtherNet/IP port is provided. Information is provided on the basic setup, tag data links, FINS communications (non-disclosure), and other features. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500) and <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).
W502	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series Instructions Reference Manual	Learning about the specifications of the instruction set that is provided by OMRON	The instructions in the instruction set (IEC 61131-3 specifications) are described. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500) and <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).
W508	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series Motion Control Instructions Reference Manual	Learning about the specifications of the motion control instructions that are provided by OMRON	The motion control instructions are described. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500), <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501) and <i>NJ-series CPU Unit Motion Control User's Manual</i> (Cat. No. W507).

Cat. No.	Model number	Manual	Application	Description
W503	NX701-□□□□ NJ501-□□□□ NJ301-□□□□ NJ101-□□□□	NJ/NX-series Troubleshooting Manual	Learning about the errors that may be detected in an NJ/NX-series Controller.	Concepts on managing errors that may be detected in an NJ/NX-series Controller and information on individual errors are described. Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500) and <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).
W504	SYSMAC-SE2□□□	Sysmac Studio Version 1 Operation Manual	Learning about the NJ/NX-series Supports Software and how to use it	An introduction to the Support Software is provided along with information on the installation procedure, basic operations, connection procedures, and procedures for the main features.
W490 W498 W491 Z317 W492 W494 W497 W495 W493	CJ1W-□□□□	CJ-series Special Unit Manuals for NJ-series CPU Unit	Learning how to connect CJ-series Units	The methods and precautions for using CJ-series Units with an NJ-series CPU Unit are described, including access methods and programming interfaces. Manuals are available for the following Units. Analog I/O Units, Insulated-type Analog I/O Units, Temperature Control Units, ID Sensor Units, High-speed Counter Units, and DeviceNet Units, EtherNet/IP Units, CompoNet Master Units Use this manual together with the <i>NJ-series CPU Unit Hardware User's Manual</i> (Cat. No. W500) and <i>NJ-series CPU Unit Software User's Manual</i> (Cat. No. W501).

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2015.4

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2015 All Right Reserved.